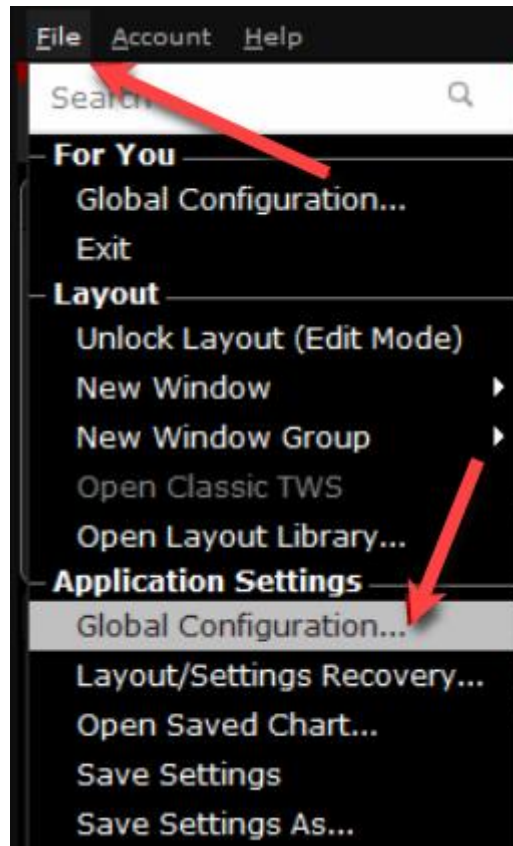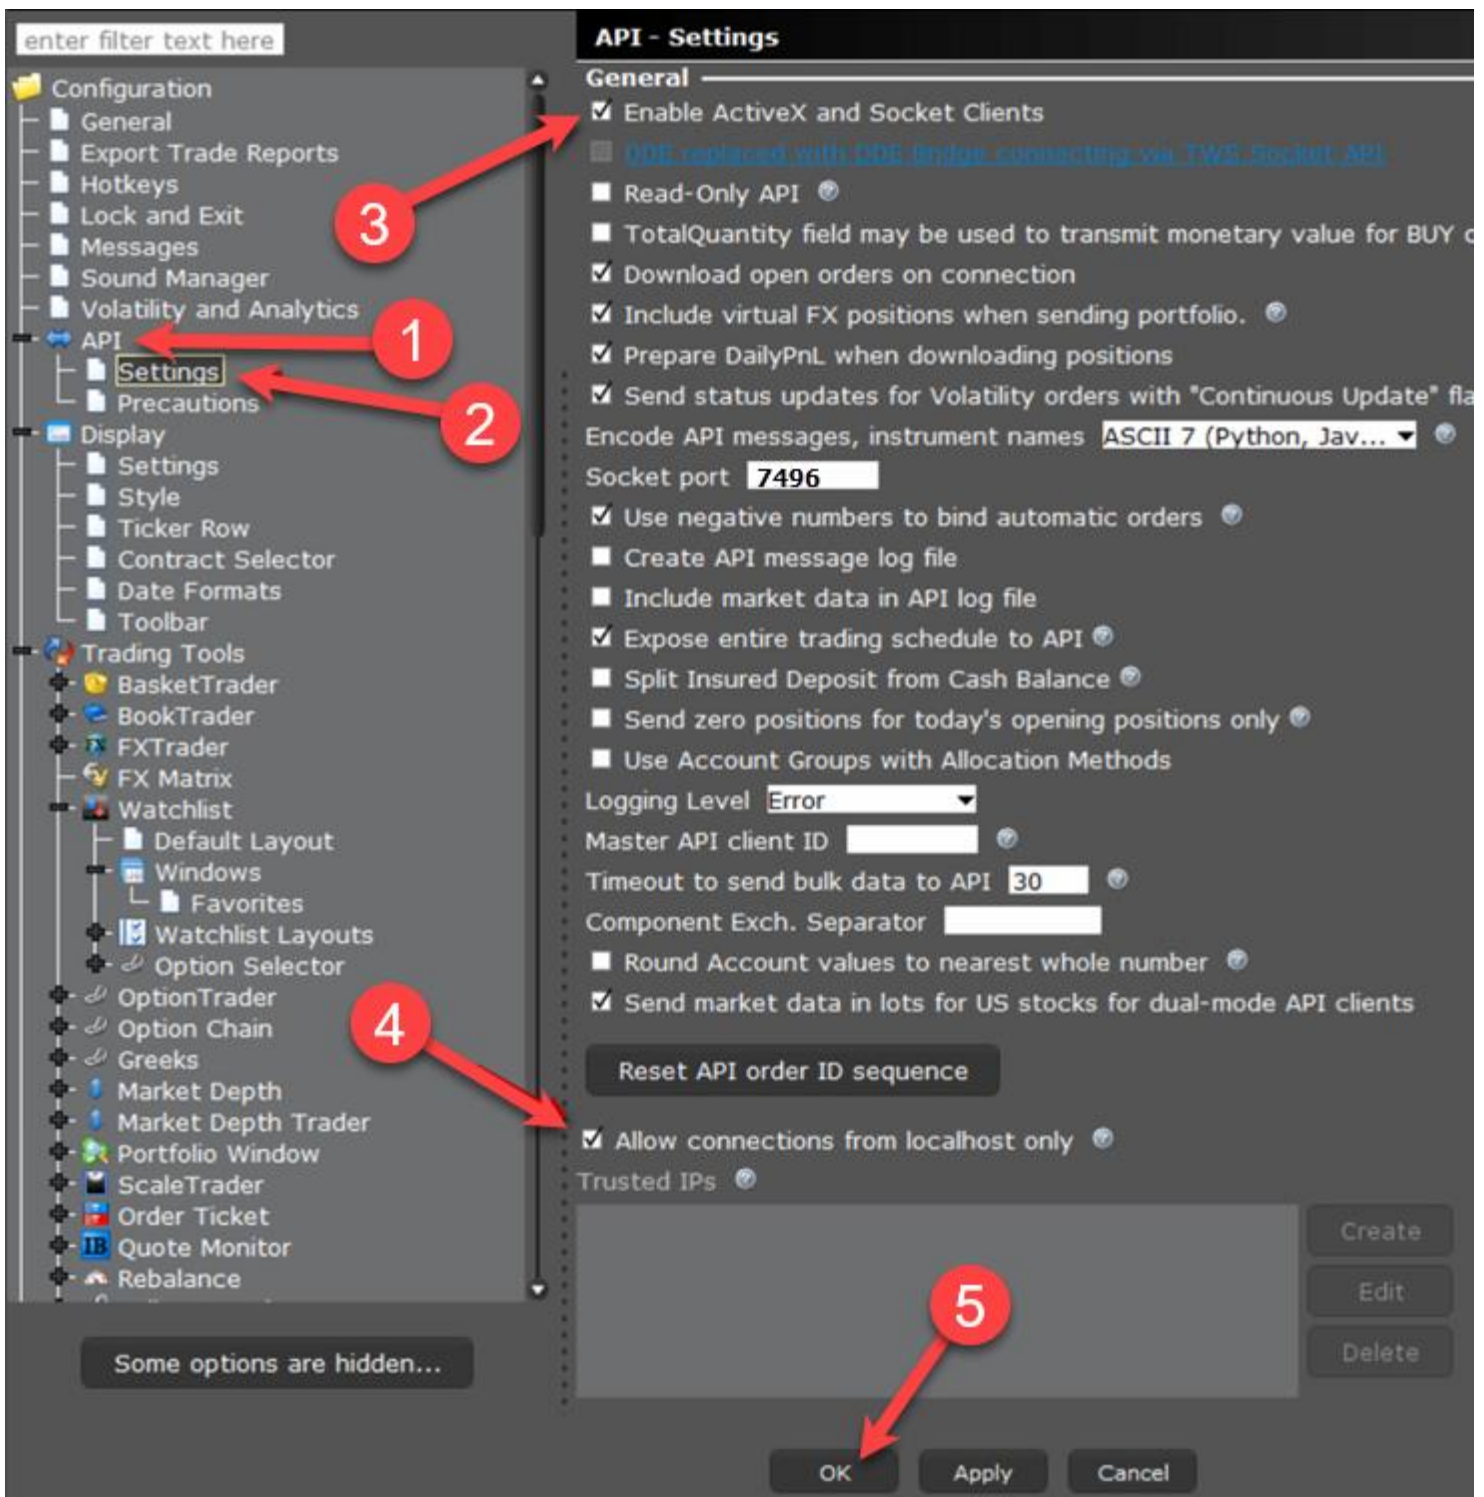# Interactive Brokers Enable ActiveX Settings

The Interactive Brokers Trader Workstation (TWS) has properties that must be set in order for Ensign to receive data. In the TWS platform select File | Global Configuration.
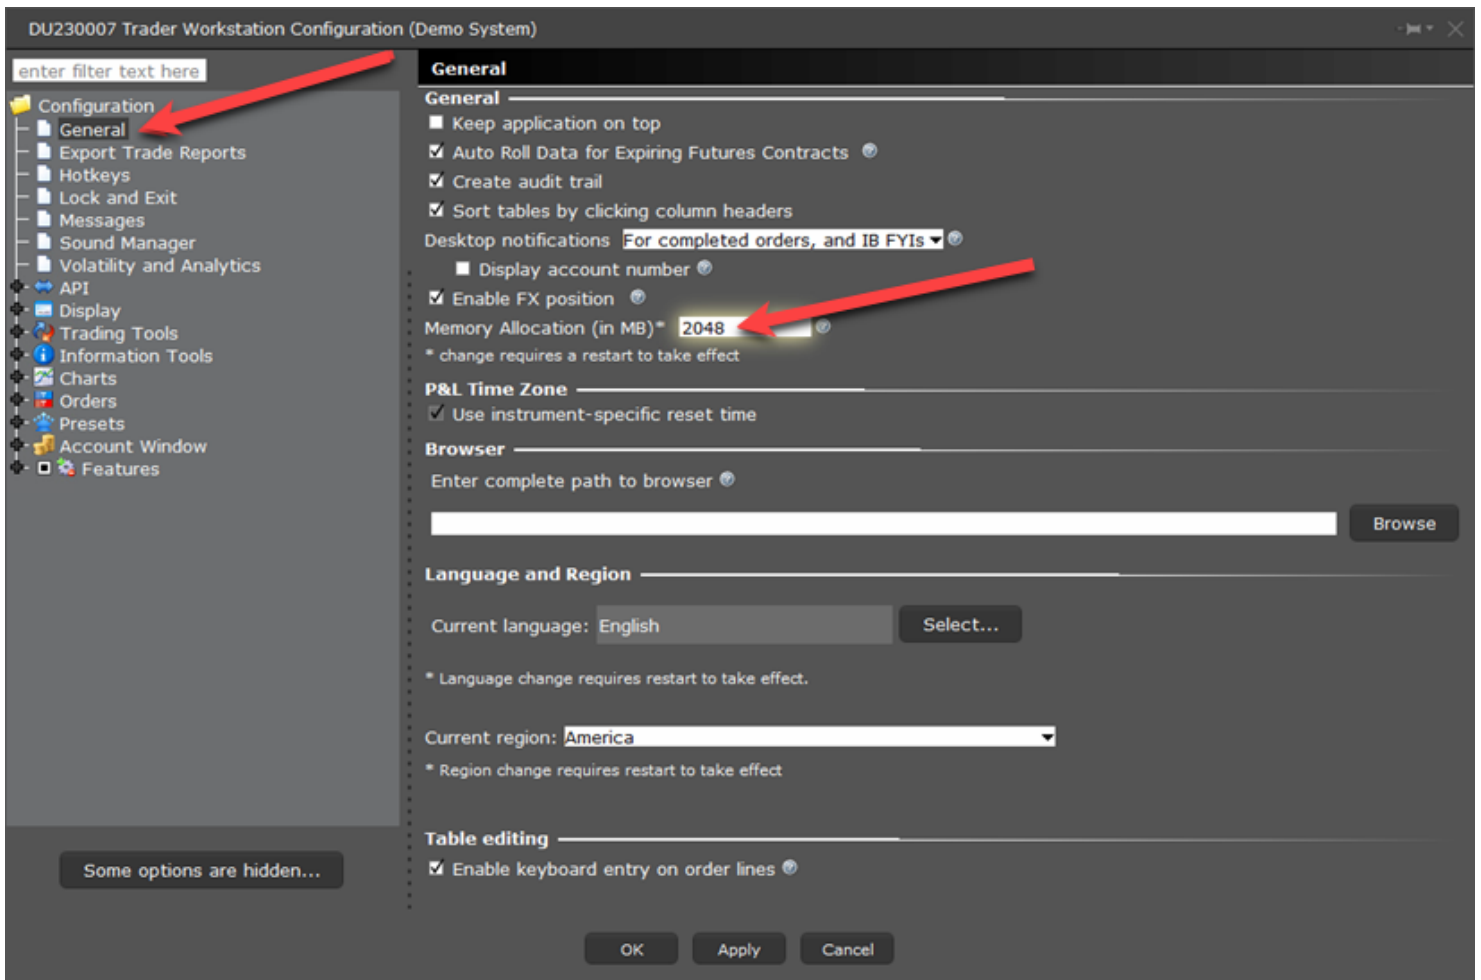

The 'API - Settings' window will open as shown below.

1. Expand the 'API' menu.
2. Select the 'Settings' sub-menu.
3. Check the box for 'Enable ActiveX and Socket Clients'.
4. Check the box for 'Allow connections from localhost only'.
5. Click the 'OK' button to close the window.

Click the 'General' menu and set the 'Memory Allocation' to 2048 as shown below.

The Ensign charting software will now be able to connect to the Interactive Brokers TWS.